
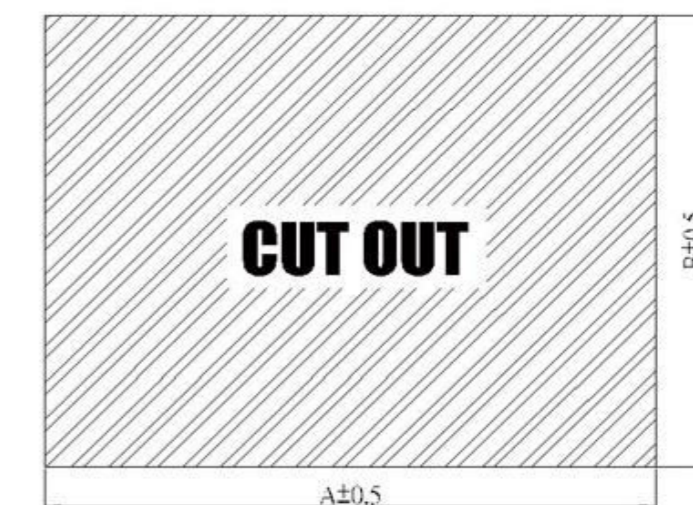
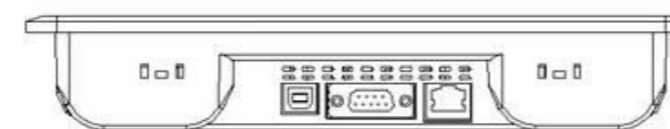
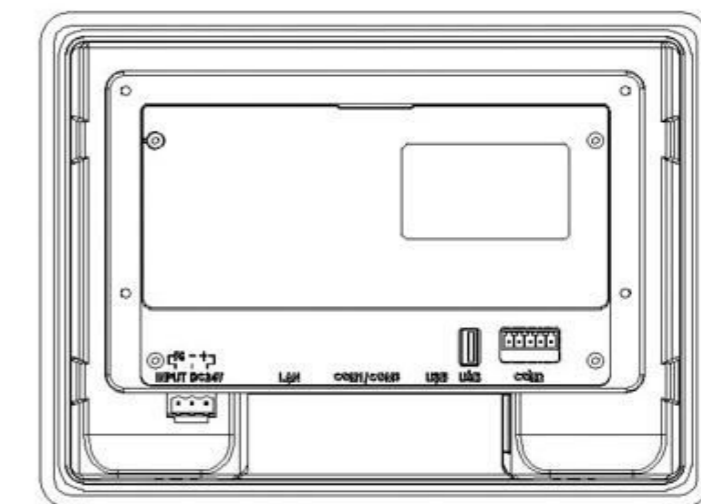
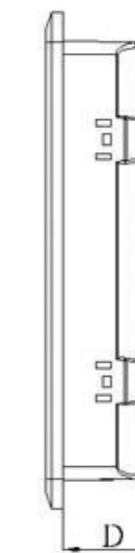
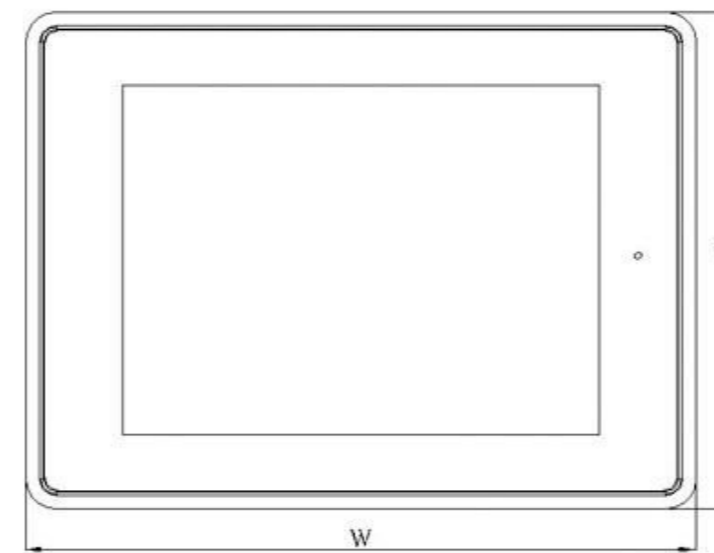


peri com. pevizz - ngx608

Model Name		GX608-TST
Sub-models		4
Display	Size	8" diagonal
	Max. Resolution	800*600
	Type	TFT LCD with LED Backlight
	Max. Colors	16-bit
	Backlight Life (hr)	20,000
	Display Contrast	500
	Luminance (cd/m2)	250
Touch Screen		4-wire Analog Resistive Type
CPU		RISC ARM11 800MHz
Backup SRAM		1MB
Working Memory		256MB
Built-in Storage Memory		1GB (64MB:Win CE OS)
Real-Time Clock (RTC)		YES
Communication Interface	Micro SD Slot	YES
	USB Client	YES (USB 2.0)
	USB Host	YES (USB 1.1)
	Serial (Com1)	RS232/422/485
	Serial (Com2)	A-RS422/485 B-RS232/485 C-RS232 with RTS&CTS
	Serial (Com3)	RS232 only (optional: RS485 only)
	Serial (Com4)	N/A
	Ethernet	YES
Front Function Keys		N.A
Audio out (optional)		YES
Video in (optional)		N.A
Front USB Host Port		N.A
Power	Supply Voltage	24VDC±10% Isolated
	Consumption	20W
Environment	Operating Temperature	-20°C~60°C (-25°C~70°C optional with AL front, CE certified only)
	Relative Humidity	10%~90%
	Shock (operation)	10 ~ 55Hz(X,Y,Z direction, 1G, 30 Mins shock testing)
	EMI	FCC Part 15 Class A
	CE	EN61000-6-2, EN61000-6-4
	UL Certification	YES
	Ingress Protection	IP66
Cooling		Natural Cooling
Dimension WxHxD (mm)		241.6 x 184.6 x 46
Cutout Dimension WxH (mm)		221.0 x 164.0
Net Weight (Kg)		1.1

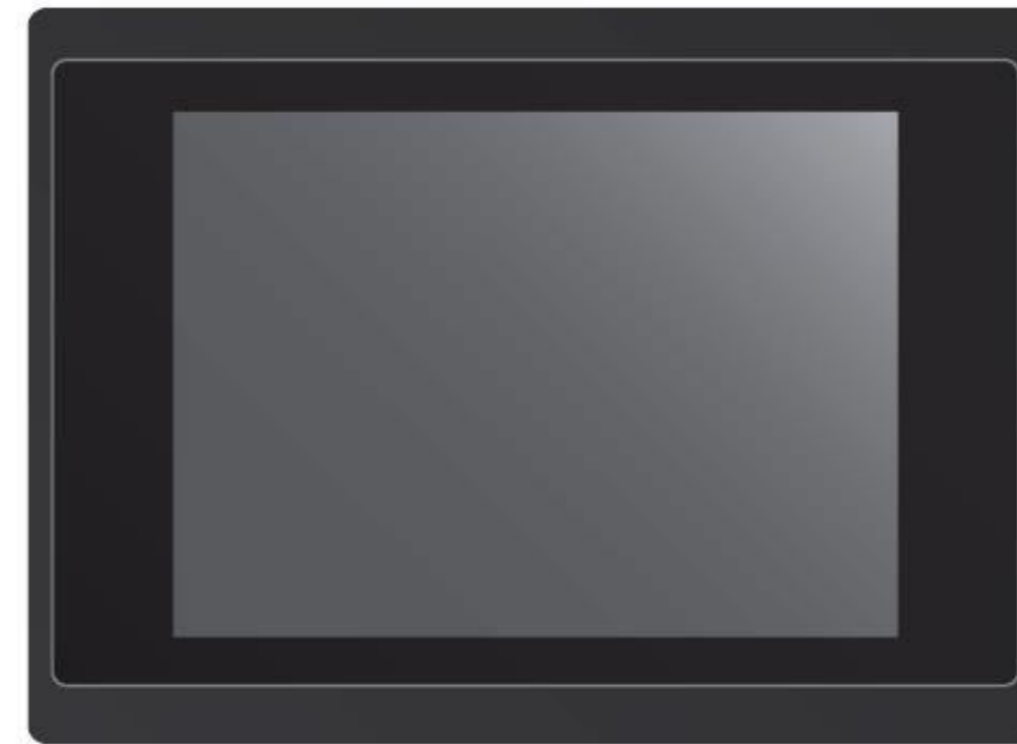

Pericom AG
 Moskau 314 B
 CH 8262 Ramsen
 t 052 740 00 55
 info@pericom.biz
 www.pericom.biz

Waldstr. 7
 DE 78262 Gailingen
 t 07734 48 70 343