PX217W-J



Ordering Information

PX217WC-J6	17.3” Capacitive, Intel Celeron J6412
PX217WR-J6	17.3” Resistive, Intel Celeron J6412

Hardware

- Intel Celeron J6412 (2.0GHz)
- J6412: 8GB RAM, 256GB Flash
- J6412: 2 x GbE RJ-45
- 2 x RS232 (422/485 option)
- WiFi 2.4G & 5G, BT 4.0, (SIM/GPS option)
- 2x USB 2.0, 2 x USB 3.0
- 1x HDMI, 1 x VGA
- 1x Line-out/Mic-in, 2 x built-in Speakers

Display & Touch

- 17.3” TFT-LCD, 1920x1080
- Brightness 400 (cd/m²)
- View angle 160/145 (H°/V°)
- Backlight Lifetime 50,000 hours
- Contrast 600:1
- Capacitive/Resistive touch

OS & Power


- Win 10 / Linux
- 12~24VDC, < 48 watts


Mechanical


- Dimension 452 (W) x 285 (H) x 70.5 (D) mm
- Net weight 4.8 (Kgs)
- Cut-out 434.8 (W) x 267.8 (H)
- Panel Mount, VESA 75x75/100x100
- Aluminum front bezel and chassis (Black)

Environmental

- IP65 Front
- Op. Temp -10°C ~ 50°C
- Storage Temp. -20C° ~ 70°C
- 10% to 90% @ 40°C (non-condensing)
- CE/FCC (EN 55022, EN 55024, EN 61000-3-2, EN 61000-3-3)

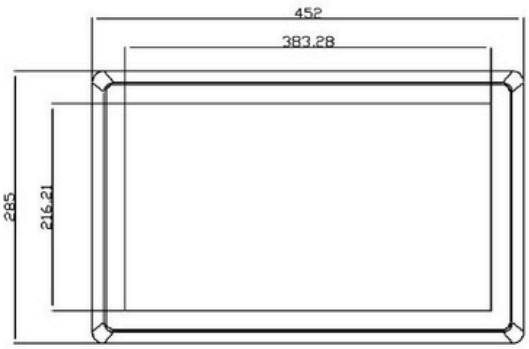



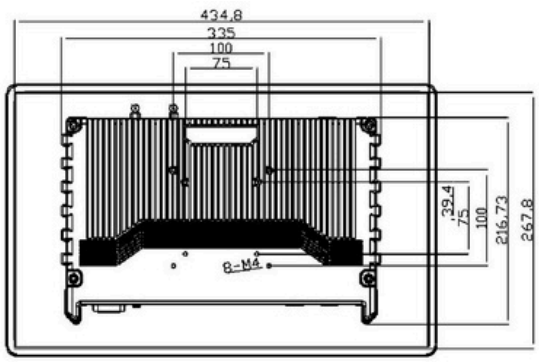

Pericom AG
Moskau 314B
CH-8262 Ramsen
www.pericom.biz
info@pericom.biz
T +41 52 74000 55

T&O Electronic Solutions GmbH
Tiefenbachstraße 5
D-83734 Hausham
www.to-es.de
hello@to-es.de
T +49 8026 928620