



peri com.



Industrial Ethernet Switches

Product Selection Guide

2023/2024



Substations & Smart Grid

page 4



System requirements:

- Compliance with IEC 61850-3, ensuring the best EMI shielding and communication without error
- Communication redundancy: ERPS and compatible Ring, STP/RSTP/ MSTP/Master/Client
- Fiber optic uplinks for long-distance transmission, noise resistance, and huge bandwidth for upgrading
- Wide range of temperature support
- IEEE 1588 support for precision timing
- Highest network availability in compliance with HSR/PRP
- Security features based on IEC 62443

ATOP solutions:

- EH97xx
- RHG95xx
- EHG95xx
- RHG96xx
- EHG96xx
- RHG97xx
- RHG98xx



Industrial Automation & Process control

page 7



System requirements:

- RSTP/ERPS and other ring topologies for network redundancy
- Wide range of operation temperature support
- Profinet CC-B certified (EHG7504/08, EH75xx)
- Redundant power supply
- Level-3 EMC protection
- IP30 metal housing with DIN-Rail /wall mount (optional)
- Security features based on IEC 62443 (managed switch)

ATOP solutions:

- EH(G)20xx
- EHG73xx
- EH(G)3005
- EH(G)75xx
- EH(G)23xx
- EHG76xx
- EH(G)33xx
- EMG8305
- EH3408
- EMG8xxx
- EHG64xx
- RHG76xx
- EHG65xx
- NSG33xx





Smart City

page 12



System requirements:

- PoE bt/at/af support
- RSTP/ERPS and other ring topologies for network redundancy
- Redundant power supply
- Level-3 EMC protection
- Security features based on IEC 62443

ATOP solutions:

- EHG2408
- EHG64xx
- EHG65xx
- EH(G)75xx
- RHG7xxx
- EHG76xx
- EHG77xx



Railway & Transportation

page 16



System requirements:

- PoE at/af support
- IP67 or IP30 enclosure
- EN50155 & IEC60571 for rolling stock certified
- EN50121-4 for trackside certified
- EN45545-2 for fire protection
- NEMA TS-2 & E-Mark certified for traffic control applications
- Security features based on IEC 62443

ATOP solutions:

- EHG73xx
- EHG75xx
- EHG76xx
- RHG75xx
- RHG76xx
- EMG83xx
- EMG85xx
- EMG86xx



Oil & Gas

page 22



System requirements:

- UL Class 1 Division 2 ATEX
- Wide range of operation temperature support

ATOP solution:

- EHG73xx



Substations & Smart Grid

Industrial Networking Solutions for the Power Industry


Over the years, different standards for the utility communication protocols used in power grid networks have been developed and adopted across the world. DNP 3 has become the preferred standard in North America, enabling open, standard-based interconnectivity. In Europe, IEC 60870-5 101/103/104 is widely used for sending and receiving values with time stamps and performing other commands. Meanwhile, the rest of the world has predominantly used Modbus protocol for data exchange of one-bit binary registers or 16-bit registers. To overcome the barriers caused by different protocols, the International Electrotechnical Commission (IEC) developed IEC 61850, which provides a standard communication protocol for electrical substations and power grid automation.

IEC 61850 uses a data modeling scheme to clearly describe each component of a power grid or substation as standard logical nodes. This object-oriented protocol enables integration of all protection, control, measurement, and monitoring functions, providing detailed data access to the power grid system. Additionally, IEC 61850 Part 3 specifies the hardware and network suitability requirements, such as electromagnetic immunity (EMI), surge protection, vibration and shock resistance, and temperature range in which devices must function.

Another important aspect of substation networks is cybersecurity—the consequences of a data breach for critical infrastructure are too high. ATOP IEC 61850 switches are IEC 62443 compliant, offering mind-relieving features like 802.1x access control, AAA, ACL, IP Source Guard, and network monitoring. They ensure reliability, availability and optimal performance in power grid networks.

IEC 61850-3 Device Compliancy Specifications require the device to:

- a. Operate in a temperature range from -40°C to 75°C.
- b. Be capable of reliably handling long-distance transmissions through fiber optic connectivity.
- c. Guarantee QoS (Quality of Service) management and real-time packet switching for GOOSE event messages.
- d. Support IEEE1588 Precision Timing Protocol (PTP) requirements for power grid networks.
- e. Guarantee a level of redundancy that minimizes packet loss. Ring topologies should be supported, and zero-packet-loss technologies such as HSR (High availability Seamlessly Redundancy) or PRP (Parallel Redundancy Protocol) are strongly recommended to be supported. ATOP's devices support RSTP (Rapid Spanning-Tree Protocol) and ERPS rings. When equipped with HSR/PRP modules, our innovative RHG9528/RHG9628 switch can guarantee no loss of GOOSE packets.
- f. Support MMS server for unified management.
- g. Have a wide tolerance for vibrations and shocks. ATOP offers a range of devices with full MIL-STD-810F compliance.
- h. Have tough electromagnetic immunity and comply with emission standards.
- i. Have at least Level 3 EMC protection; have at least Level 4 ESD, EFT and Surge protection; and have at least Level 5 PFMF and Damped Oscillatory Magnetic Field immunity.

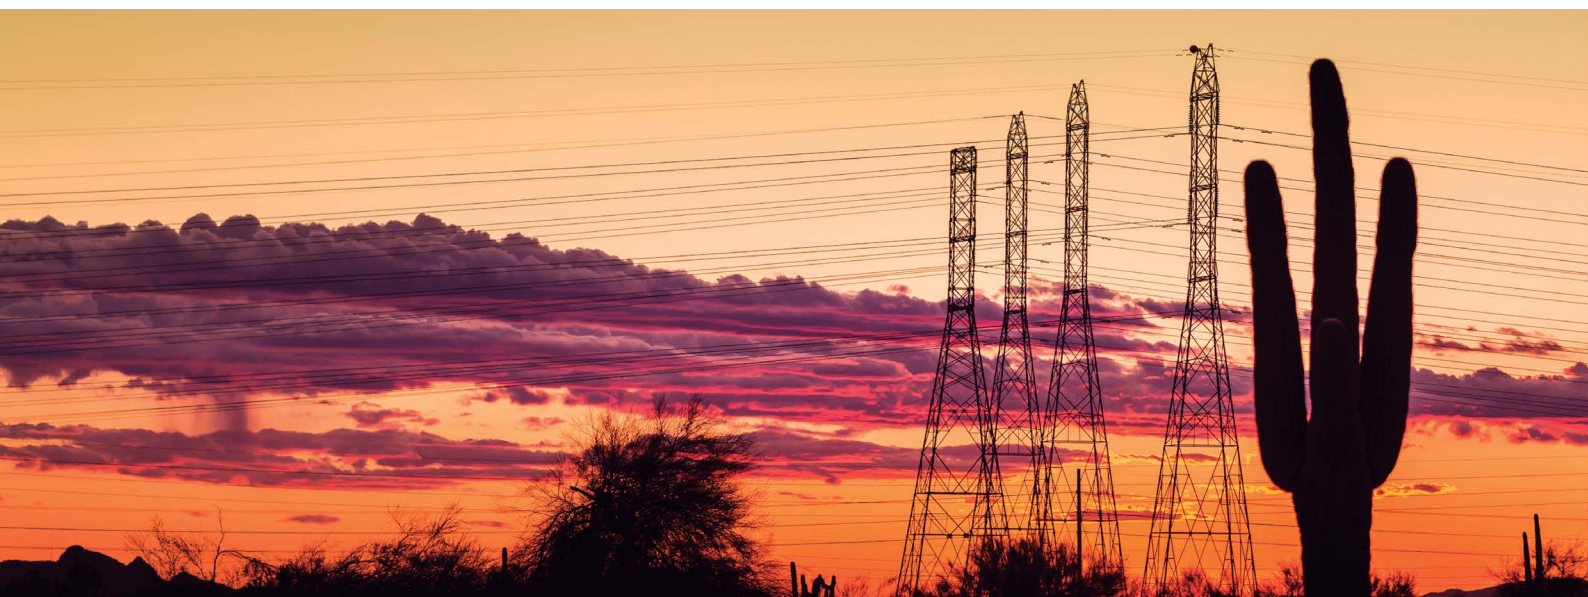


SUPERVISORY LAYER

PROTOCOLS

- Ethernet - Fiber
- Ethernet - Copper
- Serial RS-485 - Modbus
- Process Bus

STATION BUS

PROCESS BUS

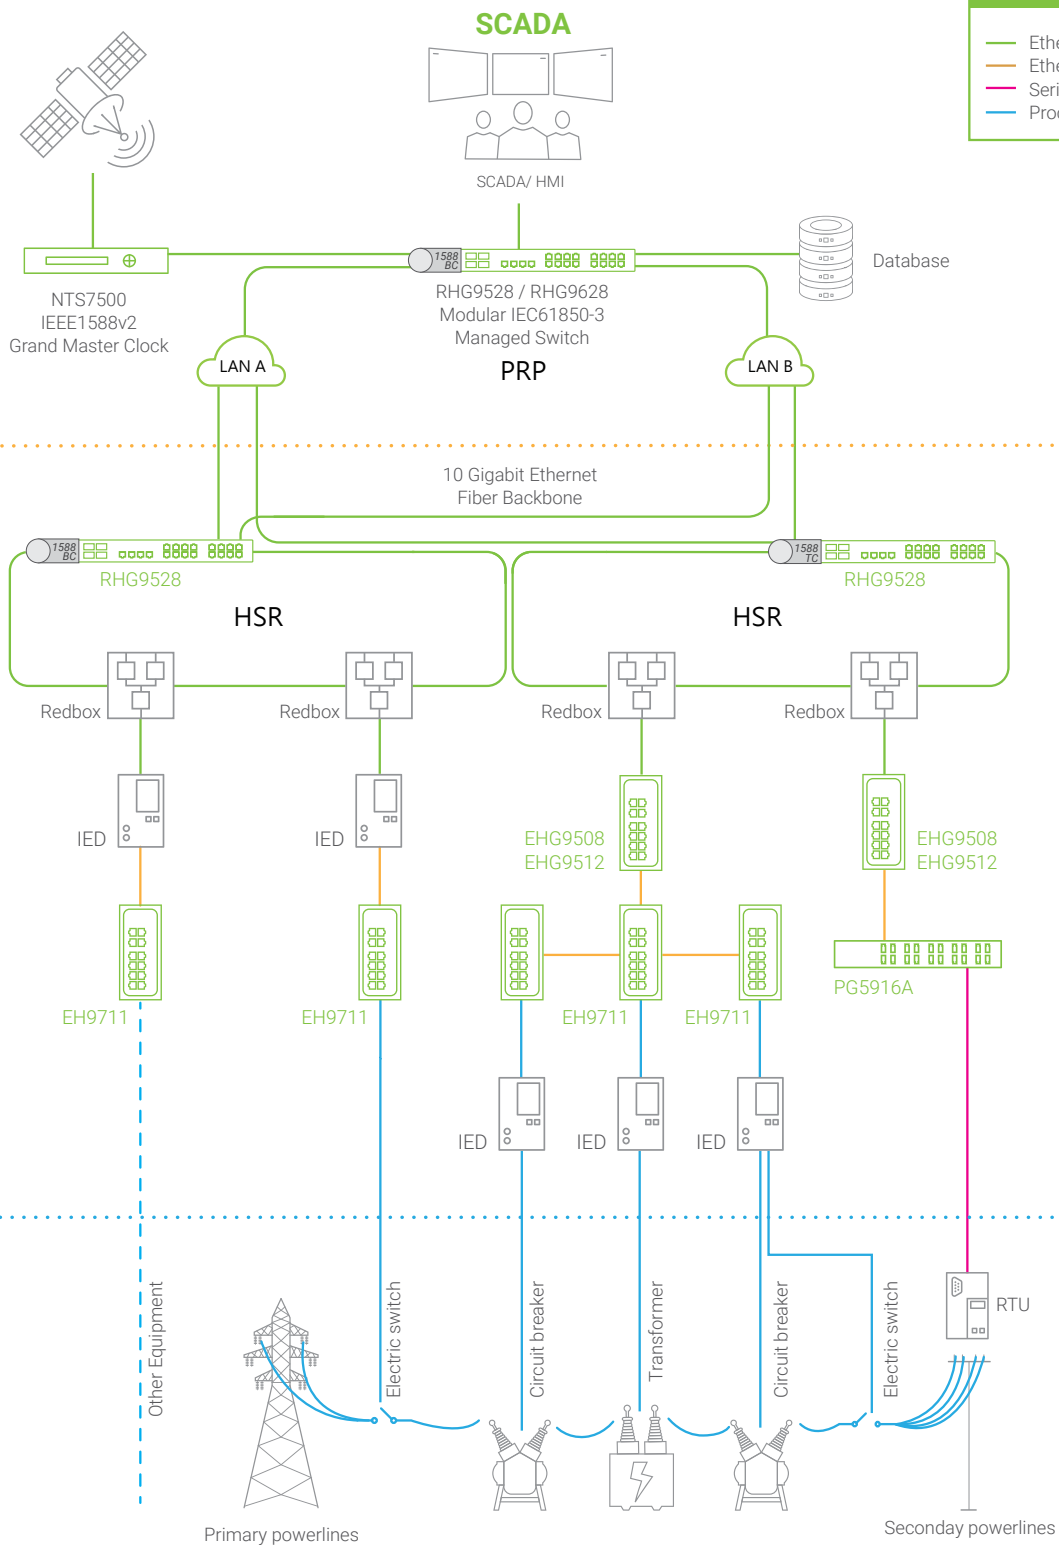

IEC61850-3 Certified Managed SwitchesZ

| | DIN-Rail Mount | | | Rack-Mount, Modular | | | |
|--------------------------------------|---|---|---|---|--|---|---|
| |  |  |  |  |  |  |  |
| General Information | NEW! | | | | | Coming soon | Coming soon |
| Model Number | EH9711 | EHG9508 | EHG9512 | RHG9528 | RHG9628 | RHG9728 | RHG9828 |
| Modular Design | | | | | | | |
| Gigabit Copper Module | | | | • | • | • | • |
| Gigabit Fiber Module | | | | • | • | • | • |
| Number of ports | | | | | | | |
| Total number of ports | 11 | 8 | 12 | Max 28 | Max 28 | Max 28 | Max 28 |
| 10 Gigabit Ethernet SFP | - | - | - | 4 | 4 | 4 | 4 |
| Gigabit Ethernet | 11 | 8 | 12 | Max 28 | Max 28 | Max 28 | Max 28 |
| 10/100 BaseT(X) | 8 | - | - | - | - | - | - |
| 10/100/1000BaseT(X) | - | 6 | 8 | Max 24 | Max 24 | Max 24 | Max 24 |
| 100/1000 Base-X SFP | 3 | - | - | Max 24 | Max 24 | Max 24 | Max 24 |
| 1000Base-X SFP | - | 2 | 4 | Max 28 | Max 28 | Max 28 | Max 28 |
| HSR/PRP RJ45 ports or SFPs | - | - | - | Max 4 | Max 4 | - | - |
| 1PPS output BNC | - | - | - | 1 (SB version) | 1 (SB version) | 1 | 1 |
| PoE 802.3 af/at/bt | - | - | - | - | - | Max 24 | Max 24 |
| Power Supply input | | | | | | | |
| Power input | 24-48VDC | 24-57 VDC | 24-57 VDC | 24-120 VDC | 24-120 VDC | Modular: 12-120 VDC / 120-380 VDC / 100-240 VAC / 48-57 VDC for PoE PSE | |
| Power input (High-Voltage option) | 110-240VAC 110-300VDC | 100-220 VAC or 135-330VDC | 100-220 VAC or 135-330VDC | 100-240 VAC or 120-380 VDC | 100-240 VAC or 120-380 VDC | | |
| Power Redundancy | • | Optional | Optional | • | • | • | • |
| Relay Output | • | • | • | • | • | • | • |
| Mechanical | | | | | | | |
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Metal |
| Installation | DIN-rail | DIN-rail | DIN-rail | Rack-mount | Rack-mount | Rack-mount | Rack-mount |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 77 x 163 x 138 | 77 x 147 x 113 | 77 x 147 x 113 | 440 x 44 x 355 | 440 x 44 x 355 | 440 x 44 x 355 | 440 x 44 x 355 |
| Supported Temperatures | | | | | | | |
| Operations Temperature | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | |
| STP/RSTP/MSTP | • | • | • | • | • | • | • |
| HSR/PRP | | | | with module | with module | | |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • |
| Precision Timing | | | | | | | |
| IEEE1588v2 Hardware-based E2E TC | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based P2P TC | • | | | • | • | • | • |
| IEEE1588v2 Hardware-based BC/full TC | • | | | SB version only | SB version only | • | • |
| Synchronous Ethernet (SyncE) | • | | | SB version only | SB version only | • | • |
| Protocols | | | | | | | |
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • |
| IGMPv1/v2/v3/ IGMP Snooping | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • |
| L3 routing (static/RIP/OSPF/PIM/BGP) | | | | | • | | • |
| Compliance | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | | | | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | | | • | • | | |
| UL61010-2-201 | | • | • | | | | |
| IEC61850-3 / IEEE1613 | • | • | • | • | • | • | • |

Industrial Automation & Process Control

Entry level

ATOP offers reliable, cost-effective unmanaged switches for simple network topologies in harsh environments. IP30-rated and certified for Industrial EMC (EN61000-6-4 and EN61000-6-2), they comply with FCC, TUV, UL, and CE standards. Housing comes in plastic, steel, or aluminum to suit different industrial environments, with plastic allowing operation temperatures from 0°C to 60°C and metal achieving -10°C to 70°C. All switches have redundant power supplies and offer 4 to 8 Fast Ethernet or Gigabit Ethernet ports. Fiber optic uplinks and PoE ports are also available on select models.

For networks that require just a bit more management and insight, lite-managed switches offer key functions like redundancy and diagnosis. With wider applications than unmanaged switches, they represent very good value for money.

Advanced features

ATOP's managed switches are designed to support demanding networks and environments, featuring 4 to 28 Fast Ethernet, Gigabit or 10 Gigabit ports, wide operating temperature range, PoE/PoE+ ports, and more. Selected products have MIL-STD shock and vibration certification, operating ranges as wide as -40°C to 75°C, and Profinet CC-B v2.33 certification, making them IoT ready.

ATOP layer 2 managed switches focus on reliable performance in harsh industrial environments, supporting advanced network management with features like redundancy protocols, precision time synchronization, and efficient network management through various interfaces. Layer 3 switches are ideal for scaling industrial networks or large surveillance applications, supporting IPv4 static routing, BGP, RIP/RIPv2, OSPFv2, and multicast protocols. The NAT switch provides a means to change the header of IP packets and simplifying topologies. Slim type switches are valuable in space-limited applications.



Security-conscious

In today's world of increasing cyber incidents, it is crucial to ensure that network devices comply with the technical requirements of the IEC 62443 standard. This involves implementing enhanced component-level protection and mechanisms to manage device security.

As of 2022, ATOP is proud to be certified in IEC 62443-4-1 and is currently in the process of receiving recognition for IEC 62443-4-2 as well. This certification demonstrates ATOP's dedication to meeting the highest standards of network security and providing reliable and secure products to their customers.



Industrial Unmanaged Switches

Unmanaged Switches



General Information

NEW!

NEW!

| Model Number | EH2005 | EH2006 | EH2008 | EHG2008 | EH3005 | EHG3005 | EH2305 | EH2306 | EH2304-PR |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-----------------|
| Number of ports | | | | | | | | | |
| Total number of ports | 5 | 6 | 8 | 8 | 5 | 5 | 5 | 6 | 4 |
| Fast Ethernet 10/100 BaseT(X) | 4 | 6 | 8 | - | 5 | - | 4 | 6 | 4 |
| Fast Ethernet Fiber ports (SFP, LC or ST) | 1 | - | - | - | - | - | 1 | - | - |
| Gigabit 10/100/1000 BaseT(X) | - | - | - | 8 | - | 5 | - | - | - |
| Gigabit 100/1000Base-X SFP | - | - | - | - | - | - | - | - | - |
| Gigabit 1000Base-X SFP | - | - | - | - | - | - | - | - | - |
| MACsec 802.1AE secure ports | - | - | - | - | - | - | - | - | - |
| PoE/PoE+ ports | - | - | - | - | - | - | - | - | - |
| Power Supply input | | | | | | | | | |
| Power input | 9-30 V | 9-30 V | 9-48 V | 9-48 V | 12-48 V | 12-48 V | 9-30 V | 9-30 V | 9-48 V |
| Power input (High-Voltage option) | | | | | | | | | |
| Power Redundancy | • | • | • | • | • | • | • | • | • |
| Relay output | | | | | | | | | |
| Mechanical | | | | | | | | | |
| Housing | Plastic | Plastic | Plastic | Plastic | Plastic | Plastic | Aluminum | Aluminum | Metal |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 45 x 90 x 80 | 45 x 90 x 80 | 45 x 90 x 80 | 45 x 90 x 80 | 23 x 94 x 72 | 23 x 94 x 72 | 45 x 90 x 78 | 45 x 90 x 78 | 22.5 x 110 x 78 |
| Supported Temperatures | | | | | | | | | |
| Operations Temperature | 0 to +60°C | 0 to +60°C | 0 to +60°C | 0 to +60°C | 0 to +60°C | 0 to +60°C | -10 to +70°C | -10 to +70°C | -10 to +70°C |
| Storage Temperature | -40 to +60°C | -40 to +60°C | -40 to +60°C | -40 to +60°C | -20 to +70°C | -20 to +70°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | | |
| STP/RSTP/MSTP | | | | | | | | | |
| ITU-T G.8032 ERPS Ring | | | | | | | | | |
| MRP (Master/Client) | | | | | | | | | |
| Protocols | | | | | | | | | |
| SNMPv1/v2c/v3 | | | | | | | | | |
| Modbus TCP | | | | | | | | | |
| IEEE802.1ad LACP Port Trunking | | | | | | | | | |
| IEEE802.1p QoS | | | | | | | | | |
| IEEE802.1q VLAN | | | | | | | | | |
| IEEE802.1x for Authentication | | | | | | | | | |
| IEEE1588v2 Hardware-based E2E TC | | | | | | | | | |
| IGMPv1/v2/v3 IGMP Snooping | | | | | | | | | |
| DHCP Option 66/67/82 | | | | | | | | | |
| IPv4/IPv6 | | | | | | | | | |
| ACLs | | | | | | | | | |
| GARP, GVRP, GMRP | | | | | | | | | |
| L3 Switching (Static, RIP, OSPF) | | | | | | | | | |
| Compliance | | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • | • |
| UL61010-2-201 | | | | | | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | | | |
| E-Mark | | | | | | | | | |
| NEMA TS2 | | | | | | | | | |
| Marine (DNV.GL) | | | | | | | | | |
| EN50155/ EN50121-4 | | | | | | | | | |

Industrial Unmanaged Switches

Unmanaged Switches



General Information

| Model Number | EH2308 | EH2308-PR | EHG2308 | EH2316-2G | EH3305 | EHG3305 | EHG6408 | EHG6410 |
|---|--------------|---------------|--------------|----------------|--------------|--------------|-----------------------|-----------------------|
| Number of ports | | | | | | | | |
| Total number of ports | 8 | 8 | 8 | 16 | 5 | 5 | 8 | 10 |
| Fast Ethernet 10/100 BaseT(X) | 8 | 8 | - | 14 | 5 | - | - | - |
| Fast Ethernet Fiber ports (SFP, LC or ST) | - | - | - | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | - | - | 8 | 2 | - | 5 | 8 | 8 |
| Gigabit 100/1000Base-X SFP | - | - | - | - | - | - | - | 2 |
| Gigabit 1000Base-X SFP | - | - | - | - | - | - | - | - |
| MACsec 802.1AE secure ports | - | - | - | - | - | - | - | - |
| PoE/PoE+ ports | - | - | - | - | - | - | Max 8 (boost) | Max 8 (boost) |
| Power Supply input | | | | | | | | |
| Power input | 9-48 V | 9-48 V | 9-48 V | 9-48 V | 12-48 V | 12-48 V | 12-57V (PoE from 12V) | 12-57V (PoE from 12V) |
| Power input (High-Voltage option) | | | | | | | | |
| Power Redundancy | • | • | • | • | | | • | • |
| Relay output | | | | | | | • | • |
| Mechanical | | | | | | | | |
| Housing | Aluminum | Metal | Aluminum | Metal | Metal | Metal | Metal | Metal |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 45 x 90 x 78 | 45 x 110 x 90 | 45 x 90 x 78 | 54 x 113 x 145 | 23 x 93 x 70 | 23 x 93 x 70 | 54 x 113 x 145 | 54 x 113 x 145 |
| Supported Temperatures | | | | | | | | |
| Operations Temperature | -10 to +70°C | -10 to +70°C | -10 to +70°C | -10 to +60°C | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | |
| STP/RSTP/MSTP | | | | | | | | |
| ITU-T G.8032 ERPS Ring | | | | | | | | |
| MRP (Master/Client) | | | | | | | | |
| Protocols | | | | | | | | |
| SNMPv1/v2c/v3 | | | | | | | | |
| Modbus TCP | | | | | | | | |
| IEEE802.1ad LACP Port Trunking | | | | | | | | |
| IEEE802.1p QoS | | | | | | | | |
| IEEE802.1q VLAN | | | | | | | | |
| IEEE802.1x for Authentication | | | | | | | | |
| IEEE1588v2 Hardware-based E2E TC | | | | | | | | |
| IGMPv1/v2/v3 IGMP Snooping | | | | | | | | |
| DHCP Option 66/67/82 | | | | | | | | |
| IPv4/IPv6 | | | | | | | | |
| ACLs | | | | | | | | |
| GARP, GVRP, GMRP | | | | | | | | |
| L3 Switching (Static, RIP, OSPF) | | | | | | | | |
| Compliance | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | | | • | • |
| UL61010-2-201 | | | | | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | | |
| E-Mark | • | | | | | | | |
| NEMA TS2 | | | | | | | | |
| Marine (DNV.GL) | | | | | | | | |
| EN50155/ EN50121-4 | | | | | | | • | • |

Industrial Unmanaged and Lite-Managed Ethernet Switches

| | Unmanaged Switches | | | | Lite-Managed Switches | | | NAT Switches | |
|---|---|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |  |
| General Information | | | | | NEW! | | | NEW! | NEW! |
| Model Number | EHG7305 | EHG7306 | EHG7307 | EMG8305 | EH3408 | EHG6508 | EHG6510 | NSG3308 | NSG3309 |
| Number of ports | | | | | | | | | |
| Total number of ports | 5 | 6 | 7 | 5 | 8 | 8 | 10 | 8 | 9 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - | - | - | - | - | - | - |
| Fast Ethernet Fiber ports (SFP, LC or ST) | - | - | - | - | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | 5 | 5 | 5 | 5 (M12) | 8 | 8 | 8 | 8 (6 for SFP models) | 9 (7 for SFP models) |
| Gigabit 100/1000Base-X SFP | - | 1 | 2 | - | - | - | (2)* | - | - |
| Gigabit 1000Base-X SFP | - | - | - | - | - | - | (2)* | 2 (SFP models) | 2 (SFP models) |
| MACsec 802.1AE secure ports | - | - | - | - | - | - | - | - | - |
| PoE/PoE+ ports | Max 4 | Max 4 | Max 4 | - | - | Max 8 (boost) | Max 4 (boost) | - | - |
| Power Supply input | | | | | | | | | |
| Power input | 12-57 V (PoE from 12V) | 12-57 V (PoE from 12V) | 12-57 V (PoE from 12V) | 9-48 V | 12-48 V | 12-57V (PoE from 12V) | 12-57V (PoE from 12V) | 12-48 V | 12-48 V |
| Power input (High-Voltage option) | | | | | | | | | |
| Power Redundancy | • | • | • | • | • | • | • | • | • |
| Relay output | • | • | • | | • | • | • | • | • |
| Mechanical | | | | | | | | | |
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Metal | Metal | Metal |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 32 x 90 x 110 | 45 x 90 x 110 | 45 x 90 x 110 | 106 x 196 x 48 | 25.4 x 140 x 112 | 54 x 113 x 145 | 54 x 113 x 145 | 45.3 x 110 x 89.6 | 60 x 110 x 89.6 |
| Supported Temperatures | | | | | | | | | |
| Operations Temperature | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +75°C or -10 to +60°C | -40 to +75°C | -40 to +75°C | -40 to +70°C | -40 to +70°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +60°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | | |
| STP/RSTP/MSTP | | | | | RSTP only | RSTP only | RSTP only | • | • |
| ITU-T G.8032 ERPS Ring | | | | | | | | | |
| MRP (Master/Client) | | | | | | | | | |
| Protocols | | | | | | | | | |
| SNMPv1/v2c/v3 | | | | | • | • | • | • | • |
| Modbus TCP | | | | | • | • | • | | |
| IEEE802.1ad LACP Port Trunking | | | | | | | | | |
| IEEE802.1p QoS | | | | | • | • | • | | |
| IEEE802.1q VLAN | | | | | • | • | • | • | • |
| IEEE802.1x for Authentication | | | | | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | | | | | | | | | |
| IGMPv1/v2/v3 IGMP Snooping | | | | | | | | | |
| DHCP Option 66/67/82 | | | | | | | | • | • |
| IPv4/IPv6 | | | | | IPv4 | IPv4 | IPv4 | IPv4 | IPv4 |
| ACLs | | | | | | | | • | • |
| GARP, GVRP, GMRP | | | | | | | | | |
| L3 Switching (Static, RIP, OSPF) | | | | | | | | IPv4 NAT | IPv4 NAT |
| Compliance | | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | | • | • | | |
| UL61010-2-201 | • | • | • | • | | | | • | • |
| Atex Zone 2 - UL C1D2 | | | | | | | | | |
| E-Mark | | | | | | | | | |
| NEMA TS2 | | | | | | | | | |
| Marine (DNV.GL) | | | | | | | | | |
| EN50155/ EN50121-4 | • | • | • | • | | | | | |

*Numbers in parenthesis are options

Industrial Full Managed Ethernet Switches

| | Managed L2 Fast-Ethernet Switches | | | | Managed L2 Gigabit Switches | | | |
|---|---|---|---|---|--|---|---|---|
| |  |  |  |  |  |  |  |  |
| General Information | | | | | | | | |
| Model Number | EH7506 | EH7508 | EH7512 | EH7520 | EHG7504 | EHG7508 | EMG8508 | EMG8510 |
| Number of ports | | | | | | | | |
| Total number of ports | 6 | 8 | 12 | 20 | 4 | 8 | 8 | 10 |
| Fast Ethernet 10/100 BaseT(X) | 4 | 4 | 8 | 16 | - | - | - | - |
| Fast Ethernet Fiber ports (SFP, LC or ST) | 2 (SFP) | - | - | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | - | (4) combo | (4) combo | (4) combo | Max 4 | Max 8 | 8 (M12) | 8 (M12) |
| Gigabit 100/1000Base-X SFP | - | (4) combo | (4) combo | (4) combo | - | - | - | - |
| Gigabit 1000Base-X SFP | - | - | - | - | Max 4 | Max 8 | - | 2 |
| MACsec 802.1AE secure ports | - | - | - | - | - | - | - | - |
| PoE/PoE+ ports | Max 4 | Max 4 | Max 8 | Max 8 | Max 4 | Max 8 | Max 8 | Max 8 |
| Power Supply input | | | | | | | | |
| Power input | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 12-57V (PoE from 45V) | 12-57V (PoE from 45V) |
| Power input (High-Voltage option) | | | | | | | 45-145 VDC | 45-145 VDC |
| Power Redundancy | • | • | • | • | • | • | • | • |
| Relay output | • | • | • | • | • | • | • | • |
| Mechanical | | | | | | | | |
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Aluminum | Aluminum |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | Field-Mount | Field-Mount |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP67 | IP67 |
| Dimensions (L x W x H) mm | 60 x 138 x 164 | 60 x 138 x 164 | 60 x 138 x 164 | 78 x 138 x 164 | 54 x 113 x 145 | 54 x 113 x 145 | 216 x 232 x 72 | 216 x 232 x 72 |
| Supported Temperatures | | | | | | | | |
| Operations Temperature | -20 to +70°C | -20 to +70°C | -20 to +70°C | -20 to +70°C | -20 to +70°C | -20 to +70°C | -40 to +75°C | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | |
| STP/RSTP/MSTP | • | • | • | • | • | • | • | • |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • | • |
| MRP (Master/Client) | • | • | • | • | • | • | • | • |
| Protocols | | | | | | | | |
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • | • |
| Profinet | CC-B | CC-B | CC-B | CC-B | CC-B | CC-B | | |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | • | • | • | • | • | • | • | • |
| IGMPv1/v2/v3 IGMP Snooping | • | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • | • |
| L3 Switching (Static, RIP, OSPF) | | | | | | | | |
| Compliance | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | | |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • |
| UL61010-2-201 | • | • | | • | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | • | • |
| E-Mark | | | | | | | | |
| NEMA TS2 | | | | | • | • | | |
| Marine (DNV.GL) | • | • | • | | | | | |
| EN50155/ EN50121-4 | | | | | • | • | • | • |

Smart Cities

Enabling Reliable Communications for Infrastructure, Surveillance, and Smart Buildings

As cities continue to grow and evolve, the demand for more efficient and sustainable services increases. Smart cities are a response to this demand, with the goal of using technology to enhance urban infrastructure, services, and quality of life.

Smart city networks play a crucial role in a city's communication and data exchange needs. ATOP smart city solutions are scalable and flexible to accommodate the changing needs of a smart city. Compliance with industry standards and regulations, such as the IEEE 802.1 standards, allows interoperability and compatibility with other devices. PoE ports are available for easy, cost-effective installation and maintenance. Especially with the development of high-performance surveillance cameras, 802.3bt support for higher PoE power supply are necessary for widespread use. Fast Ethernet, Gigabit Ethernet, and even 2.5G or 10G speeds provide reliable, rapid data transmission with low latency. Wide operating temperature ranges and rugged hardware alleviate the risk of failure in harsh environments, while ring support facilitates quick recovery in case of accidents.

Last but not least, a range of security features, including encryption, authentication, and access control, ensure the confidentiality, integrity, and availability of data.



Industrial Switches for Smart Cities

| | Unmanaged Switches | | Lite-Managed Switches | | | | Managed L2 Fast Ethernet Switches | | | |
|---|--------------------------|--------------------------|-----------------------|---------------------------------|--------------------------|--------------------------|-----------------------------------|-------------------------|-------------------------|-------------------------|
| | | | | | | | | | | |
| General Information | | | | | | | | | | |
| Model Number | EHG6408 | EHG6410 | EHG2408 | EH3408 | EHG6508 | EHG6510 | EH7506 | EH7508 | EH7512 | EH7520 |
| Number of ports | | | | | | | | | | |
| Total number of ports | 8 | 10 | 8 | 8 | 8 | 10 | 6 | 8 | 12 | 20 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - | - | - | - | 4 | 4 | 8 | 16 |
| Fast Ethernet Fiber ports (SFP, LC or ST) | - | - | - | - | - | - | 2 (SFP) | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | 8 | 8 | 8 | 8 | 8 | 8 | - | (4) combo | (4) combo | (4) combo |
| Gigabit 100/1000Base-X SFP | - | 2 | - | - | - | 2 | - | (4) combo | (4) combo | (4) combo |
| Gigabit 1000Base-X SFP | - | - | - | - | - | 2 | - | - | - | - |
| MACsec 802.1AE secure ports | - | - | 2 | - | - | - | - | - | - | - |
| PoE/PoE+ ports | Max 8 (boost) | Max 8 (boost) | - | - | Max 8 (boost) | Max 8 (boost) | Max 4 | Max 4 | Max 8 | Max 8 |
| Power Supply input | | | | | | | | | | |
| Power input | 12-57V (PoE from 12V) | 12-57V (PoE from 12V) | 9-48 V | 12-48 V | 12-57V (PoE from 12V) | 12-57V (PoE from 12V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) |
| Power input (High-Voltage option) | | | | | | | | | | |
| Power Redundancy | • | • | • | • | • | • | • | • | • | • |
| Relay output | • | • | • | • | • | • | • | • | • | • |
| Mechanical | | | | | | | | | | |
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Metal | Metal | Metal | Metal |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 54 x 113 x 145 | 54 x 113 x 145 | 110 x 89 x 45 | 25,4 x 140 x 112 | 54 x 113 x 145 | 54 x 113 x 145 | 60 x 138 x 164 | 60 x 138 x 164 | 60 x 138 x 164 | 78 x 138 x 164 |
| Supported Temperatures | | | | | | | | | | |
| Operations Temperature | -40 to +75°C | -40 to +75°C | 0 to +60°C | -40 to +75°C or -10 to +60°C | -40 to +75°C | -40 to +75°C | -20 to +70°C | -20 to +70°C | -20 to +70°C | -20 to +70°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +60°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | | | |
| STP/RSTP/MSTP | | | RSTP only | RSTP only | RSTP only | RSTP only | • | • | • | • |
| ITU-T G.8032 ERPS Ring | | | | | | | • | • | • | • |
| MRP (Master/Client) | | | | | | | • | • | • | • |
| Protocols | | | | | | | | | | |
| SNMPv1/v2c/v3 | | | • | • | • | • | • | • | • | • |
| Modbus TCP | | | • | • | • | • | • | • | • | • |
| PROFINET | | | | | | | CC-B | CC-B | CC-B | CC-B |
| IEEE802.1ad LACP Port Trunking | | | | • | • | • | • | • | • | • |
| IEEE802.1p QoS | | | | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | | | | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | | | • | | | | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | | | | | | | | | | |
| IGMPv1/v2/v3 IGMP Snooping | | | | | | | • | • | • | • |
| DHCP Option 66/67/82 | | | | | | | • | • | • | • |
| IPv4/IPv6 | | | IPv4 | IPv4 | IPv4 | IPv4 | • | • | • | • |
| ACLs | | | | | | | • | • | • | • |
| GARP, GVRP, GMRP | | | | | | | • | • | • | • |
| L3 Switching (Static, RIP, OSPF) | | | | | | | | | | |
| Compliance | | | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • | • | • |
| UL61010-2-201 | | | | | | | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | | | | |
| E-Mark | | | | | | | | | | |
| NEMA TS2 | | | | | | | • | • | • | |
| Marine (DNV.GL) | | | | | | | | | | |
| EN50155/ EN50121-4 | • | • | | | | | | | | |

Industrial Managed Ethernet Switches for Smart Cities

Managed L2 Gigabit Switches



General Information

Coming soon Coming soon

| Model Number | EHG7504 | EHG7508 | EHG7512 | EHG7516 | EHG7520 | RHG7528 | EHG7704 | EHG7706 |
|---|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|-------------------------|-------------------------|
| Number of ports | | | | | | | | |
| Total number of ports | 4 | 8 | 12 | 16 | 20 | Max 28 | 4 | 6 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - | - | - | - | - | - |
| Fast Ethernet Fiber ports (SFP, LC or ST) | - | - | - | - | - | - | 4 | 4 |
| Gigabit 10/100/1000 BaseT(X) | Max 4 | Max 8 | Max 8 | Max 12 | Max 16 | Max 28 | - | - |
| Gigabit 100/1000Base-X SFP | - | - | Max 8 | Max 12 | Max 16 | Max 24 | - | - |
| Gigabit 1000Base-X SFP | Max 4 | Max 8 | - | - | - | - | - | - |
| Gigabit 2.5Gbps or 10Gbps | - | - | 4 x 10Gbps | 4 x 10Gbps | 4 x 10Gbps | - | - | 2 x 2.5Gbps |
| MACsec 802.1AE secure ports | - | - | - | - | - | Max 4 | - | - |
| PoE/PoE+ ports | Max 4 | Max 8 | Max 8 | Max 8 | Max 8 | Max 24 | Max 4 | Max 4 |
| Power Supply input | | | | | | | | |
| Power input | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 48-57V (PoE from 48V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) |
| Power input (High-Voltage option) | | | | | | 110-220VAC | | |
| Power Redundancy | | | | | | Optional | • | • |
| Relay output | • | • | • | • | • | • | • | • |
| Mechanical | | | | | | | | |
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Aluminum | Aluminum |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | Rack-mount | DIN-rail | DIN-rail |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 54 x 113 x 145 | 54 x 113 x 145 | 76 x 160 x 200 | 95 x 160 x 200 | 95 x 160 x 200 | 440 x 44 x 340 | 25 x 163 x 138 | 25 x 163 x 138 |
| Supported Temperatures | | | | | | | | |
| Operations Temperature | -20-70°C | -20 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +75°C | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | |
| STP/RSTP/MSTP | • | • | • | • | • | • | • | • |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • | • |
| MRP (Master/Client) | • | • | • | • | • | • | • | • |
| Protocols | | | | | | | | |
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • | • |
| Profinet | CC-B | CC-B | | | | | | |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | • | • | • | • | • | • | • | • |
| IGMPv1/v2/v3 IGMP Snooping | • | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • | • |
| L3 Switching (Static, RIP, OSPF) | | | | | | | | |
| Compliance | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • |
| UL61010-2-201 | | | | | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | | |
| E-Mark | | | | | | | • | |
| NEMA TS2 | • | • | • | • | • | | On demand | On demand |
| Marine (DNV.GL) | | | • | • | | | | |
| EN50155/ EN50121-4 | • | • | | | | • | • | • |

Industrial Managed Ethernet Switches for Smart Cities

| | Managed L2 Gigabit Switches | | | Managed L3 Gigabit Switches | | | | |
|---|--|-------------------------|-------------------------|-----------------------------|-------------------------|-------------------------|-------------------------|--------------------------|
| | | | | | | | | |
| General Information | Coming soon | Coming soon | | | | | | |
| Model Number | EHG7708 | EHG7711 | EHG7604 | EHG7608 | EHG7612 | EHG7616 | EHG7620 | RHG7628 |
| Number of ports | | | | | | | | |
| Total number of ports | 8 | 11 | 4 | 8 | 12 | 16 | 20 | Max 28 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - | - | - | - | - | - |
| Fast Ethernet Fiber ports (SFP, LC or ST) | 4 or 8 | 8 | - | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | - | - | Max 4 | Max 8 | Max 8 | Max 12 | Max 16 | Max 28 |
| Gigabit 100/1000Base-X SFP | Max 2 | 1 | - | - | Max 8 | Max 12 | Max 16 | Max 24 |
| Gigabit 1000Base-X SFP | - | - | Max 4 | Max 8 | - | - | - | - |
| Gigabit 2.5Gbps or 10Gbps | Max 2 x 2.5Gbps | 2 x 2.5Gbps | - | - | 4 x 10Gbps | 4 x 10Gbps | 4 x 10Gbps | - |
| MACsec 802.1AE secure ports | - | - | - | - | - | - | - | Max 4 |
| PoE/PoE+ ports | Max 8 | Max 8 | Max 4 | Max 8 | Max 8 | Max 8 | Max 8 | Max 24 |
| Power Supply input | | | | | | | | |
| Power input | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 48-57V (PoE from 48V) |
| Power input (High-Voltage option) | | | | | | | | 110-220VAC |
| Power Redundancy | • | • | | | | | | Optional |
| Relay output | • | • | • | • | • | • | • | • |
| Mechanical | | | | | | | | |
| Housing | Aluminum | Aluminum | Metal | Metal | Metal | Metal | Metal | Metal |
| Installation | DIN-rail | DIN-rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | DIN-Rail | Rack-mount |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 25 x 163 x 138 | 60 x 163 x 138 | 54 x 113 x 145 | 54 x 113 x 145 | 76 x 160 x 200 | 95 x 160 x 200 | 95 x 160 x 200 | 440 x 44 x 340 |
| Supported Temperatures | | | | | | | | |
| Operations Temperature | -40 to +75°C (-20°C to +60°C for c model) | -40 to +75°C | -20 to +70°C | -20 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | |
| STP/RSTP/MSTP | • | • | • | • | • | • | • | • |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • | • |
| MRP (Master/Client) | • | • | • | • | • | • | • | • |
| Protocols | | | | | | | | |
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • | • |
| PROFINET | | | | | | | | |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | • (except c model) | • | • | • | • | • | • | • |
| IGMPv1/v2/v3 IGMP Snooping | • | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • | • |
| L3 Switching (Static, RIP, OSPF) | • | • | • | • | • | • | • | • |
| Compliance | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • |
| UL61010-2-201 | | | | | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | | |
| E-Mark | | | | | | | | |
| NEMA TS2 | On demand | On demand | • | • | • | • | • | • |
| Marine (DNV, GL) | | | | | | | | |
| EN50155/ EN50121-4 | • | • | • | • | | | | • |

Railway & Transportation

Industrial Networking for Railway and Public Transportation

Railway and Trackside Made Easy

Industrial Networking for Railway transportation

Network devices on trains must meet certain criteria such as for environmental, shock, power supply, vibration, humidity, electromagnetic interference, wide temperature range, EMC, power surge, electrostatic discharge (ESD), and transient factors.

EN 50155 is an internationally-recognized standard for electronic equipment used in railway applications. EN50121-4 defines standards for ground equipment. ATOP's railway-certified switches comply with both EN50155 and the essential sections of EN50121-4, while also offering advanced features like redundancy and precision timing. Enclosed in robust and reliable housing, they are highly suitable for use in signal control networks and on-board applications.

Temperature Requirements

| Class | Ambient Temperature Outside Vehicle | Internal Cubicle Temperature | Internal Cubicle Over-Temperature Within 10 Min. | Air Temperature Surrounding the Printed Board Assembly |
|-------|-------------------------------------|----------------------------------|--|--|
| T1 | -25°C to +40°C (-13°F to +104°F) | -25°C to +55°C (-13°F to +131°F) | +15°C (+59°F) | -25°C to +70°C (-13°F to +158°F) |
| T2 | -40°C to +35°C (-40°F to +95°F) | -40°C to +55°C (-40°F to +131°F) | +15°C (+59°F) | -40°C to +70°C (-40°F to +158°F) |
| T3 | -25°C to +45°C (-13°F to +113°F) | -25°C to +70°C (-13°F to +158°F) | +15°C (+59°F) | -25°C to +85°C (-13°F to +185°F) |
| T4 | -40°C to +50°C (-40°F to +122°F) | -40°C to +70°C (-40°F to +158°F) | +15°C (+59°F) | -40°C to +85°C (-40°F to +185°F) |

Public Transportation and Traffic Control


Industrial Networking for ITS

Intelligent Transportation Systems (ITS) are advanced systems that use modern technologies to improve the efficiency and safety of transportation systems, and building a strong networking system for ITS is crucial in ensuring the effectiveness of these systems.

ITS networks must be scalable and interoperable to support seamless communication between different devices and more as the system grows. They need reliability and low latency to ensure real-time performance, even in adverse conditions. Finally, redundancy and cybersecurity keep the system running through cyberattacks or partial failure.

ATOP's NEMA TS2 range is certified for the high/low temperature, high humidity, vibration, and mechanical shock requirements of ITS and traffic control. Certain devices also comply with DNV.GL for marine applications as well.

Possible topologies

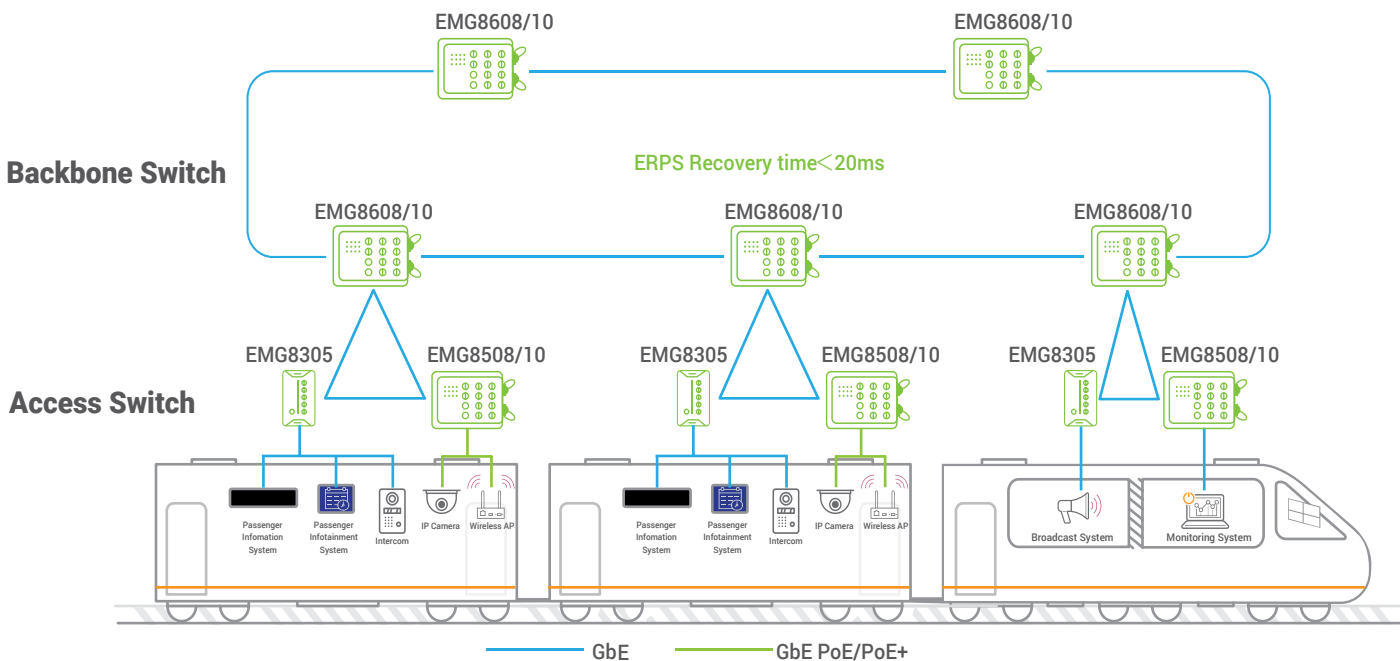

Transportation Switches

Unmanaged Switches



General Information

| | | | | | | |
|--------------|--------|---------|---------|---------|---------|---------|
| Model Number | EH2308 | EHG7305 | EHG7306 | EHG7307 | EHG6408 | EMG8305 |
|--------------|--------|---------|---------|---------|---------|---------|

Number of ports

| | | | | | | |
|-------------------------------|---|-------|-------|-------|-------|---------|
| Total number of ports | 8 | 5 | 6 | 7 | 8 | 5 |
| Fast Ethernet 10/100 BaseT(X) | 8 | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | - | 5 | 5 | 5 | 8 | 5 (M12) |
| Gigabit 1000Base-X SFP | - | - | - | - | - | - |
| Gigabit 100/1000Base-X SFP | - | - | 1 | 2 | - | - |
| 1/10 Gigabit SFP | - | - | - | - | - | - |
| PoE/PoE+ ports | - | Max 4 | Max 4 | Max 4 | Max 8 | - |

Power Supply input

| | | | | | | |
|-----------------------------------|-------|--------------------------|--------------------------|--------------------------|--------------------------|--------|
| Power input | 9-48V | 12-57V (PoE from 45V) | 12-57V (PoE from 45V) | 12-57V (PoE from 45V) | 12-57V (PoE from 12V) | 12-48V |
| Power input (High-Voltage option) | | | | | | |
| Power Redundancy | • | • | • | • | • | • |
| Relay Output | | • | • | • | • | |

Mechanical

| | | | | | | |
|---------------------------|--------------|---------------|---------------|---------------|----------------|----------------|
| Housing | Aluminum | Metal | Metal | Metal | Metal | Aluminum |
| Installation | DIN-rail | DIN-rail | DIN-rail | DIN-rail | DIN-rail | Field-mount |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP67 |
| Dimensions (L x W x H) mm | 45 x 90 x 78 | 32 x 90 x 110 | 45 x 90 x 110 | 45 x 90 x 110 | 54 x 113 x 145 | 106 x 196 x 48 |

Supported Temperatures

| | | | | | | |
|------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Operations Temperature | -10 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +75°C | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |

Network Redundancy

| | | | | | | |
|------------------------|--|--|--|--|--|--|
| STP/RSTP/MSTP | | | | | | |
| ITU-T G.8032 ERPS Ring | | | | | | |
| MRP (Master/Client) | | | | | | |

Protocols

| | | | | | | |
|----------------------------------|--|--|--|--|--|--|
| SNMPv1/v2c/v3 | | | | | | |
| Modbus TCP | | | | | | |
| Profinet CC-B | | | | | | |
| IEEE802.1ad LACP Port Trunking | | | | | | |
| IEEE802.1p QoS | | | | | | |
| IEEE802.1q VLAN | | | | | | |
| IEEE802.1x for Authentication | | | | | | |
| IGMPv1/v2/v3/ IGMP Snooping | | | | | | |
| IEEE1588v2 Hardware-based E2E TC | | | | | | |
| DHCP Option 66/67/82 | | | | | | |
| IPv4/IPv6 | | | | | | |
| ACLs | | | | | | |
| GARP, GVRP, GMRP | | | | | | |
| L3 Switching (Static, RIP, OSPF) | | | | | | |

Compliance

| | | | | | | |
|--------------------------------------|---|---|---|---|---|---|
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | | | | • | |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • |
| UL61010-2-201 | | • | • | • | | |
| Atex Zone 2 - UL C1D2 | | • | • | • | | |
| E-Mark | • | | | | | |
| NEMA TS2 | | | | | | |
| Marine (DNV.GL) | | | | | | |
| EN50155/ EN50121-4 | | • | • | • | | • |

Transportation Switches

| | Managed L2 Fast Ethernet | | | Managed L2 Gigabit Switches | | | | |
|--------------------------------------|---|---|---|---|---|---|---|---|
| |  |  |  |  |  |  |  |  |
| General Information | | | | | | | | |
| Model Number | EH7506 | EH7508 | EH7512 | EHG7504 | EHG7508 | EHG7512 | EHG7516 | EHG7520 |
| Number of ports | | | | | | | | |
| Total number of ports | 6 | 8 | 12 | 4 | 8 | 12 | 16 | 20 |
| Fast Ethernet 10/100 BaseT(X) | 4 | 4 | 8 | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | - | (4) combo | (4) combo | Max 4 | Max 8 | Max 8 | Max 12 | Max 16 |
| Gigabit 1000Base-X SFP | - | - | - | Max 4 | Max 4 | - | - | - |
| Gigabit 100/1000Base-X SFP | 2 | (4) combo | (4) combo | - | - | Max 8 | Max 12 | Max 16 |
| 1/10 Gigabit SFP | - | - | - | - | - | 4 | 4 | 4 |
| PoE /PoE+ ports | Max 4 | Max 4 | Max 8 | Max 4 | Max 8 | Max 8 | Max 8 | Max 8 |
| Power Supply input | | | | | | | | |
| Power input | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) |
| Power input (High-Voltage option) | | | | | | | | |
| Power Redundancy | • | • | • | • | • | • | • | • |
| Relay Output | • | • | • | • | • | • | • | • |
| Mechanical | | | | | | | | |
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Metal | Metal |
| Installation | DIN-rail | DIN-rail | DIN-rail | DIN-rail | DIN-rail | DIN-rail | DIN-rail | DIN-rail |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 60 x 138 x 164 | 60 x 138 x 164 | 60 x 138 x 164 | 54 x 113 x 145 | 54 x 113 x 145 | 76 x 200 x 160 | 95 x 200 x 160 | 95 x 200 x 160 |
| Supported Temperatures | | | | | | | | |
| Operations Temperature | -20 to +70°C | -20 to +70°C | -20 to +70°C | -20 to +70°C | -20 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | | |
| STP/RSTP/MSTP | • | • | • | • | • | • | • | • |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • | • |
| MRP (Master/Client) | • | • | • | • | • | • | • | • |
| Protocols | | | | | | | | |
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • | • |
| Profinet CC-B | • | • | • | • | • | • | • | • |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • | • |
| IGMPv1/v2/v3/ IGMP Snooping | • | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | • | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • | • |
| L3 routing (static/RIP/OSPF/PIM/BGP) | | | | | | | | |
| Compliance | | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • |
| UL61010-2-201 | | | | | | | | |
| Atex Zone 2 - UL C1D2 | | | | | | | | |
| E-Mark | | | | | | | | |
| NEMA TS2 | • | • | • | • | • | • | • | • |
| Marine (DNV.GL) | | | | | | • | • | |
| EN50155/ EN50121-4 | | | | • | • | | | |

Transportation Switches

Managed L2 Gigabit Switches



| General Information | Coming soon | | | | | | |
|--------------------------------------|----------------|--------------------------|--------------------------|-------------------------|-------------------------|--|-------------------------|
| Model Number | RHG7528 | EMG8508 | EMG8510 | EHG7704 | EHG7706 | EHG7708 | EHG7711 |
| Number of ports | | | | | | | |
| Total number of ports | Max 28 | 8 | 10 | 4 | 6 | 8 | 11 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | Max 24 | 8 (M12) | 8 (M12) | 4 | 4 | 4 or 8 | 8 |
| Gigabit 1000Base-X SFP | 4 or 4x10G | - | 2 | - | - | - | - |
| Gigabit 100/1000Base-X SFP | Max 24 | - | - | - | - | Max 2 | 1 |
| Gigabit 2.5Gbps or 10Gbps | - | - | - | - | 2 | Max 2 x 2.5Gbps | 2 x 2.5Gbps |
| PoE /PoE+ ports | Max 24 | Max 8 | Max 8 | Max 4 | Max 4 | Max 8 | Max 8 |
| Power Supply input | | | | | | | |
| Power input | 48-57V | 12-57V (PoE from 45V) | 12-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) |
| Power input (High-Voltage option) | 110-220VAC | 50-145VDC | 50-145VDC | | | | |
| Power Redundancy | Optional | • | • | • | • | • | • |
| Relay Output | • | • | • | • | • | • | • |
| Mechanical | | | | | | | |
| Housing | Metal | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum |
| Installation | Rack-mount | Field-mount | Field-mount | DIN-rail | DIN-rail | DIN-rail | DIN-rail |
| Ingress Protection | IP30 | IP67 | IP67 | IP30 | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 440 x 44 x 340 | 216 x 232 x 72 | 216 x 232 x 72 | 25 x 163 x 138 | 25 x 163 x 138 | 25 x 163 x 138 | 60 x 163 x 138 |
| Supported Temperatures | | | | | | | |
| Operations Temperature | -40 to +70°C | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C | -40 to +75°C (-20°C to +60°C for c model) | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Network Redundancy | | | | | | | |
| STP/RSTP/MSTP | • | • | • | • | • | • | • |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • |
| MRP (Master/Client) | • | • | • | • | • | • | • |
| Protocols | | | | | | | |
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • |
| Profinet CC-B | | | | | | | |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • |
| IGMPv1/v2/v3/ IGMP Snooping | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • |
| L3 routing (static/RIP/OSPF/PIM/BGP) | | | | | | | |
| Compliance | | | | | | | |
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | | | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • |
| UL61010-2-201 | | • | • | | | | |
| NEMA TS2 | | | | On demand | On demand | On demand | On demand |
| Marine (DNV,GL) | | | | | | | |
| E-Mark | | | | | | | |
| EN50155/ EN50121-4 | • | • | • | • | • | • | • |

Transportation Switches

Managed L3 Gigabit Switches



General Information

| | | | | | | | | |
|--------------|---------|---------|---------|---------|---------|---------|---------|---------|
| Model Number | EHG7604 | EHG7608 | EHG7612 | EHG7616 | EHG7620 | RHG7628 | EMG8608 | EMG8610 |
|--------------|---------|---------|---------|---------|---------|---------|---------|---------|

Number of ports

| | | | | | | | | |
|-------------------------------|-------|-------|-------|--------|--------|------------|---------|---------|
| Total number of ports | 4 | 8 | 12 | 16 | 20 | Max 28 | 8 | 10 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - | - | - | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | Max 4 | Max 8 | Max 8 | Max 12 | Max 16 | Max 24 | 8 (M12) | 8 (M12) |
| Gigabit 1000Base-X SFP | Max 4 | Max 4 | - | - | - | 4 or 4x10G | - | 2 |
| Gigabit 100/1000Base-X SFP | - | - | Max 8 | Max 12 | Max 16 | Max 24 | - | - |
| 1/10 Gigabit SFP | - | - | 4 | 4 | 4 | - | - | - |
| PoE/PoE+ ports | Max 4 | Max 8 | Max 8 | Max 8 | Max 8 | Max 24 | Max 8 | Max 8 |

Power Supply input

| | | | | | | | | |
|-----------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------------|--------------------------|--------------------------|
| Power input | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 9-57V (PoE from 45V) | 48-57V | 12-57V (PoE from 45V) | 12-57V (PoE from 45V) |
| Power input (High-Voltage option) | | | | | | 110-220VAC | 50-145VDC | 50-145VDC |
| Power Redundancy | • | • | • | • | • | Optional | • | • |
| Relay Output | • | • | • | • | • | • | • | • |

Mechanical

| | | | | | | | | |
|---------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Housing | Metal | Metal | Metal | Metal | Metal | Metal | Aluminum | Aluminum |
| Installation | DIN-rail | DIN-rail | DIN-rail | DIN-rail | DIN-rail | Rack-mount | Field-mount | Field-mount |
| Ingress Protection | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP67 | IP67 |
| Dimensions (L x W x H) mm | 54 x 113 x 145 | 54 x 113 x 145 | 76 x 200 x 160 | 95 x 200 x 160 | 95 x 200 x 160 | 440 x 44 x 340 | 216 x 232 x 72 | 216 x 232 x 72 |

Supported Temperatures

| | | | | | | | | |
|------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Operations Temperature | -20 to +70°C | -20 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +70°C | -40 to +75°C | -40 to +75°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |

Network Redundancy

| | | | | | | | | |
|------------------------|---|---|---|---|---|---|---|---|
| STP/RSTP/MSTP | • | • | • | • | • | • | • | • |
| ITU-T G.8032 ERPS Ring | • | • | • | • | • | • | • | • |
| MRP (Master/Client) | • | • | • | • | • | • | • | • |

Protocols

| | | | | | | | | |
|--------------------------------------|---|---|---|---|---|---|---|---|
| SNMPv1/v2c/v3 | • | • | • | • | • | • | • | • |
| Modbus TCP | • | • | • | • | • | • | • | • |
| IEEE802.1ad LACP Port Trunking | • | • | • | • | • | • | • | • |
| IEEE802.1p QoS | • | • | • | • | • | • | • | • |
| IEEE802.1q VLAN | • | • | • | • | • | • | • | • |
| IEEE802.1x for Authentication | • | • | • | • | • | • | • | • |
| IGMPv1/v2/v3/ IGMP Snooping | • | • | • | • | • | • | • | • |
| IEEE1588v2 Hardware-based E2E TC | • | • | • | • | • | • | • | • |
| DHCP Option 66/67/82 | • | • | • | • | • | • | • | • |
| IPv4/IPv6 | • | • | • | • | • | • | • | • |
| ACLs | • | • | • | • | • | • | • | • |
| GARP, GVRP, GMRP | • | • | • | • | • | • | • | • |
| L3 routing (static/RIP/OSPF/PIM/BGP) | • | • | • | • | • | • | • | • |

Compliance

| | | | | | | | | |
|--------------------------------------|---|---|---|---|---|---|---|---|
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | • | • | • | • | • | • | • | • |
| EN60950-1 and/or EN62368-1 | • | • | • | • | • | • | • | • |
| UL61010-2-201 | | • | • | | | | • | • |
| E-Mark | | | | | | | | |
| NEMA TS2 | • | • | • | • | • | | | |
| Marine (DNV.GL) | | | | | | | | |
| EN50155/ EN50121-4 | • | • | | | | • | • | • |

Oil & Gas

Guaranteeing safety in hazardous environments

The oil and gas industry requires components that can withstand harsh and dangerous environments. These environments are often full of flammable gases, liquids, vapors, and combustible dusts, which makes safety a top priority. Even a small spark can cause a catastrophic event, so any device deployed in these environments must be highly reliable, safe, and perform well. Utilizing non-sparking components is the best way to ensure safety.

ATOP's hazardous series solutions are UL Class I Division II and ATEX certified, with no normally arcing parts that may pose danger in hazardous environments. They can be deployed in hermetically sealed hazardous or explosive conditions without increasing the risk of an explosion, and in case of an accident, will not accelerate the damage.



Atex certification



Industrial Unmanaged Switches

Unmanaged Switches



General Information

| | | | |
|--------------|---------|---------|---------|
| Model Number | EHG7305 | EHG7306 | EHG7307 |
|--------------|---------|---------|---------|

Number of ports

| | | | |
|---|-------|-------|-------|
| Total number of ports | 5 | 6 | 7 |
| Fast Ethernet 10/100 BaseT(X) | - | - | - |
| Fast Ethernet Fiber ports (SFP, LC or ST) | - | - | - |
| Gigabit 10/100/1000 BaseT(X) | 5 | 5 | 5 |
| Gigabit 100/1000Base-X SFP | - | 1 | 2 |
| Gigabit 1000Base-X SFP | - | - | - |
| MACsec 802.1AE secure ports | - | - | - |
| PoE/PoE+ ports | Max 4 | Max 4 | Max 4 |

Power Supply input

| | | | |
|-----------------------------------|-----------------------|-----------------------|-----------------------|
| Power input | 12-57V (PoE from 12V) | 12-57V (PoE from 12V) | 12-57V (PoE from 12V) |
| Power input (High-Voltage option) | | | |
| Power Redundancy | • | • | • |
| Relay output | • | • | • |

Mechanical

| | | | |
|---------------------------|---------------|---------------|---------------|
| Housing | Metal | Metal | Metal |
| Installation | DIN-Rail | DIN-Rail | DIN-Rail |
| Ingress Protection | IP30 | IP30 | IP30 |
| Dimensions (L x W x H) mm | 32 x 90 x 110 | 45 x 90 x 110 | 45 x 90 x 110 |

Supported Temperatures

| | | | |
|------------------------|--------------|--------------|--------------|
| Operations Temperature | -40 to +70°C | -40 to +70°C | -40 to +70°C |
| Storage Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C |

Compliance

| | | | |
|--------------------------------------|---|---|---|
| UL/EN/IEC(CB) 60950-1 and/or 62368-1 | | | |
| EN60950-1 and/or EN62368-1 | • | • | • |
| UL61010-2-201 | • | • | • |
| Atex Zone 2 - UL C1D2 | • | • | • |
| E-Mark | | | |
| NEMA TS2 | | | |
| Marine (DNV.GL) | | | |
| EN50155/ EN50121-4 | • | • | • |



Pericom AG

Moskau 314B CH 8262 Ramsen t 052 740 00 55

Waldstr. 7 D 78262 Gailingen t 07734 48 70 343

www.pericom.biz

info@pericom.biz

