



FEATURE HIGHLIGHTS


- 8 x 10/100/1000 BaseT (X) (RJ45)
- 10/100/1000M Full/Half-Duplex, MDI/MDI-X auto-detection
- Support IEEE 802.3/ 802.3u/ 802.3x
- Profinet Packet Prioritization according to 802.1p
- Redundant DC power inputs
- Operating temperature ranges from -10°C to +70°C
- Rugged high-strength housing
- DIN-Rail or wall mounting ability

PRODUCT DESCRIPTION


EHG2308 is designed specifically for industrial applications in hazardous environments, offering 8 RJ-45 Gigabit ports as well as compliance with CE, FCC, UL, IP50 and RoHS standards.

Reliable: Its two redundant power inputs can be connected simultaneously to wide-range DC power sources. If one of the power inputs fail, the other live source takes over automatically, preventing interruptions to critical operations.


Efficient: Although it is unmanaged, EHG2308 embeds an advanced Packet Prioritization feature. By reading the QoS field inside the VLAN tag of the packet, it prioritizes those packets that must reach the end device first. In Profinet-based Industrial Automation applications, for example, this feature helps ensure minimal delay on key commands, even during network congestion.

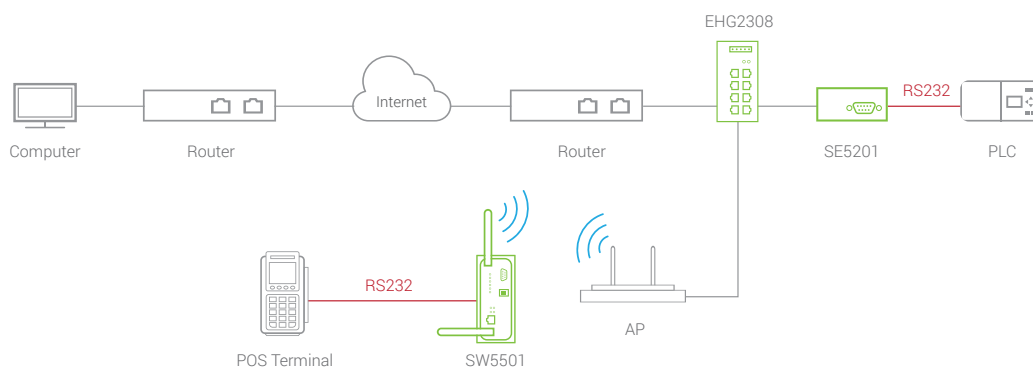


DIMENSIONS & LAYOUT

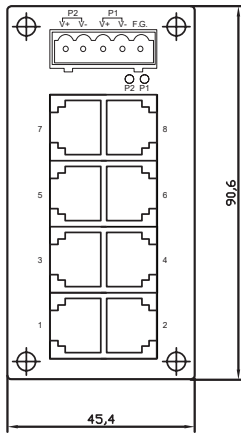

Front-panel front view

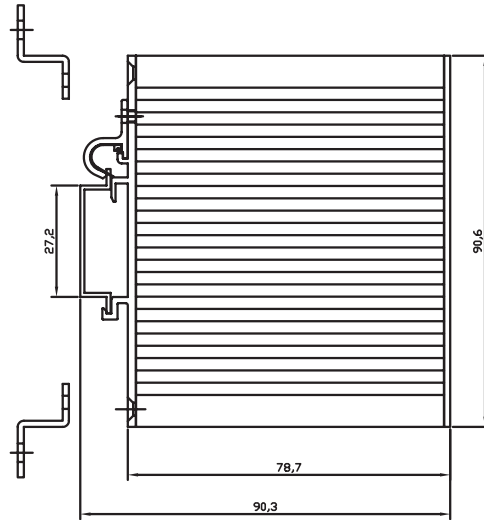

(Mount kit) Housing side view

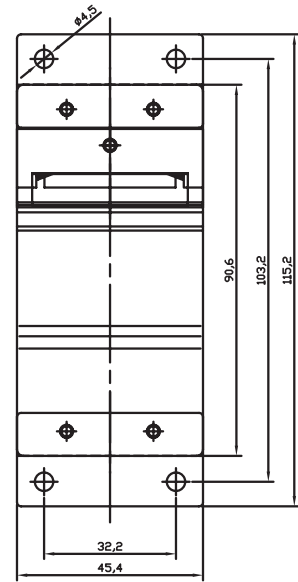

Backboard rear view

SPECIFICATIONS

Technical Specifications	
Model Name	EHG2308 Series
Ethernet	
Connector	RJ45
Ports	8
Transmission Rate	10/100/1000 Mbps
Standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T
Flow Control	IEEE802.3X flow control, back-pressure flow control
Jumbo Frame Size	Up to 9216 byte
Auto MDI/MDI-X	Yes
Power	
Input Voltage	9-48 VDC
Input Current	0.45 A
Power Consumption	4.05 Watts Max
Connector	5.08mm 5 pin Terminal Block
Reverse Polarity Protection	Yes
Redundancy	Yes
Physical Characteristics	
Housing	IP30 protection, aluminum housing
Installation	DIN Rail, Wall mount (optional)
Dimension (W x H x D)	45.2 x 90 x 78 mm
Weight	255 g
Warranty	5 years
Environmental Limits	
Operating Temperature	-10°C to +70°C (14°F to +158°F)
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Ambient Relative Humidity	5% to 95% RH (Non-condensing)

REGULATORY APPROVALS

Regulatory Approvals	
Safety	UL60950-1 2nd Ed. / CSA C22.2 No.60950-1-07 2nd Ed. / CB (IEC62368-1 / IEC62368-1)
FCC (EMI)	FCC Part 15, Subpart B, Class A
CE (EMI)	European Standard EN55032:2012+AC:2013 Class A.
	EN61000-3-2:2014, EN 61000-3-3:2013
CE (EMS)	EN55024:2010 (IEC 61000-4-2:2008)
	IEC61000-4-3:2006/A1:2007/A2:2010, IEC 61000-4-4:2012
	IEC 61000-4-5:2014, IEC 61000-4-6:2013
	IEC 61000-4-8 :2009, IEC 61000-4-11:2004
Shock	IEC 60068-2-27
Drop	IEC 60068-2-32 (ISTA Test Procedure 2A)
Vibration	IEC 60068-2-64
High Altitude	Certified for 4000 m altitude according to IEC 60068-2-13
RoHS	Lead (Pb) Free
MTBF	472359.98 hrs (25°C) / 53.92 years (25°C)
IP Protection	IP30 IEC/EN60529

ORDERING INFORMATION

Optional Accessories		
Model name	Part Number	Description
EHG2308	1P1EHG23080001G	T, 8P x 10/100/1000M, RJ45, TB5, G

Optional Accessories		
Model name	Part Number	Description
US Plug	70100000000056G	45.4 x22.8 x1.5 Aluminum wall mount with screw
AXFD-1314-0523	522AXFD1314001G	SFP Transceiver, 155 Mbps, multi-mode, 1310 nm, 2 km, -40°C to +85°C, DDMI
AXFD-1314-0553	522AXFD1314011G	SFP Transceiver, 155 Mbps, single-mode, 1310 nm, 30 km, -40°C to +85°C, DDMI
EU Plug	50500752240001G	88-264 VAC to 24 VDC, 3.2A, 75W

Pericom AG

Moskau 314 B CH 8262 Ramsen t 052 740 00 55

Waldstr. 7 D 78262 Gailingen t 07734 48 70 343

www.pericom.biz info@pericom.biz